



## EVALUATION OF ELECTRICITY GENERATION BY MICROBIAL FUEL CELL FROM HYPERSALINE INDIAN SODA LAKE

VISHAL DHUNDALE\*<sup>1</sup>, VIJAYSHREE HEMKE<sup>2</sup>, AKASH CHAUDHARI<sup>1</sup>,  
RAMKRUSHNA DARADE<sup>1</sup> AND SAGAR CHARUDE<sup>1</sup>

<sup>1</sup>*New Arts Commerce and Science College Ahmednagar, Maharashtra (India)*

<sup>2</sup>*Jijamata Mahavidyalay Buldhana, Maharashtra (India)*

### ABSTRACT

India has faced challenge for more electricity generation and alternative for the traditional sources and due to the lack and depletion of primary sources. Microbial Fuel Cells (MFCs) is an alternative source of the sustainable and renewable energy. The objective of this study was to investigate the electricity generation from the haloalkaliphilic bacterium isolated from Lonar soda crater (India). Aerobic, haloalkaliphilic bacteria were isolated and characterized from sediment and water samples. A total twenty eight bacterial culture were isolated, of which ARS4 was selected for the further MFC was investigated. The two-chamber MFCs were used to conduct experiments. The MFC was constructed and measure the electricity generation after various intervals, 387mV was electricity was generated after 1h, but after 48h the electricity generation dramatically decreased to 229mV. The effect of salt on MFC was also studied, NaCl enhanced electricity generation compared to KCl, indicating requirement of NaCl for bacterium ARS4 MFC. Supplement of glucose, increased electricity generation was found to be increases (170mV). Our results also suggest that seeking for and isolating novel bacteria that are more halophilic and alkaliphilic from Lonar crater could be a new strategy to generate bioelectricity from MFCs.

**KEYWORDS:** *Microbial Fuel Cells, Lonar soda crater, Electricity*



**VISHAL DHUNDALE\***

New Arts Commerce and Science College Ahmednagar, Maharashtra (India)

Received on: 15-04-2017

Revised and Accepted on : 30-05-2017

DOI: <http://dx.doi.org/10.22376/ijpbs.2017.8.3.b363-369>

## INTRODUCTION

In related with global warming effects and decreasing limited fossil fuel sources have promote to the search for alternative sources for energy production<sup>1</sup>. Generally biomass products tested for energy generation include a wide range of growth plants, crops and wastes<sup>2</sup>. In this context, microbial fuel cells (MFCs) can serve as an alternative to land based methods for energy generation. The cultivation of microorganisms has several advantages over other alternatives- they require less low cost nutrient, have higher growth rates and less expensive energy production. The microbes are able to degrade the organic content to produce the electricity which is known as microbial fuel cell (MFCs). The microbes act as catalyst that degrades the organic manure resulting in the generation of electricity. It is specific designs that cause microbial metabolic or enzyme catalytic activity into electricity by using electrochemical technology<sup>3</sup>. The MFC are potential for immediately capturing the electrons bring into existence when electrochemically unique bacteria degrade the organic substrates. Microbial fuel cell have become the dynamic due to the generate energy in the electric state or hydrogen from renewable sources of organic and inorganic substance by these activity MFC also can used in the bioremediation in the polluted soil and water.. The MFC are cells, producing electric power by utilizing microorganisms, instead of isolated enzymes, to assist redox reactions. The conventional MFC is a two chamber system, consisting of anode and cathode chambers that are separated by a proton exchange membrane<sup>4</sup>. MFCs have operational and functional advantages over the technologies currently used for generating energy from organic matter<sup>5</sup>. These approaches encourage, studying the microbial physiology, energy metabolism under the extremophilic environment, making MFC unique technique for studying the extracellular electron transfer system in mixed microbial communities and pure cultures. Some scientific investigation was studied for *Shewanella* sp. for the Electricity generation as MFC. Some scientific investigation was studied for *Shewanella* sp.<sup>6</sup> Over the past decade, The most extensively studied has been execute MFCs that used electrochemically active bacteria (EAB) and these were enable to convert carbon substrates into electric power. Over the past decade, The most extensively studied has been execute MFCs that used electrochemically active bacteria (EAB) to convert carbon substrates into electrical current and power<sup>7-8</sup>. Many EAB have the inherent ability to reduce metal content in their natural condition by performing extracellular electron transfer<sup>9-10</sup>. These EAB naturally occurring environments in the world, such as ocean, lake and river<sup>11-12</sup>. The electricity production has not previously been linked to the metabolic activity of haloalkaliphiles or other salt-tolerant microorganisms. However, electricity generation by anaerobic bacteria and anoxic sediments from hypersaline soda lakes was investigated by Miller and Oremland<sup>13</sup>. Soda lakes are a specific type of salt lake with high to extremely high carbonate alkalinity (pH from 9 to 11) and a moderate to extremely high salinity. They are spread all over the world, but located mostly in inland salt lakes, arid and semi-arid areas where the evaporative climate favors

accumulation of salts in local depressions. These equally extreme conditions make soda lakes a unique ecosystem. In the last decade, special attention has been given to the investigation of the microbial communities in soda lakes using traditional isolation methods and molecular biology techniques. But very few studies were investigated related to the electricity generation from MFCs from soda lake. The alkaline Lonar Lake in Buldhana district of Maharashtra is unique ecosystem and wonder in the India (latitude 19°58', Longitude 76°36'). The lake water is alkaline having an average pH of 9.5- 10. Lonar Lake is a closed lake without any outlet and unique due to its salinity, alkalinity and biodiversity. Due to the uniqueness, the lake has evoked much scientific value among researchers. The ecology and diversity of an soda lake was studied and extensively reviewed for their biotechnological potential from all over the world. The microbial diversity of saline lakes has been studied primarily by focusing on the isolation and characterization of individual organisms with potential industrial applications<sup>14-18</sup>. Many previously unidentified MFCs have been discovered in environmental samples. However, due to the difficult and time consuming procedures required to isolate such species, potentially useful EABs native to the environment most likely remain undiscovered<sup>19</sup>. As far as Indian soda lakes are concerned, a culture-dependent and independent approach has been applied to analyze bacterial diversity<sup>20</sup>. But MFCs studies for the electricity production have not previously been studied from haloalkaliphiles or other salt-tolerant microorganisms from the Lonar soda lake. The aim of the present study was to get insight into the species composition of microbial communities for electricity generation from Lonar crater.

## MATERIALS AND METHODS

### *Enrichment and isolation of microorganisms*

Enrichment of water samples and sediment samples were carried out in various enrichment media. All flasks were incubated at 37°C on a rotary shaker (100 rpm) for 48h. After enrichment, the organisms were isolated on respective media agar plates and incubated at 37°C for 24h. Well isolated and morphologically distinct colonies from these plates were transferred on the respective medium slants and maintained as stocks.

### *Identification of the bacterial culture*

Bacterial cultures were examined for their cultural, morphological character, and standard biochemical test were performed according to Bergey's Manual of systematic bacteriology.

### *Cultural condition*

The culture was retrieved by streaking on bioluminescent agar plates and incubated at 37°C. For MFC operation 2-3 isolated colonies were inoculated in 100 ml of bioluminescent Broth and incubated at 37°C at 160 rpm in 48 hrs in shaking conditions.

### *Enrichment of culture*

The 100 mL bioluminescent media prepared and inoculated with culture and incubated for 48h at 37°C.

All the flasks were incubated at RT on a rotary shaker (120 rpm) for 48h. After enrichment, these cultures serve as a MFC for the electricity generation.

### **MFC assembly design and component**

#### **Electrode**

Carbon electrode (Copper) of dimension 15cm×0.2cm were used at both the ends of cathode and anode and tightly fixed with the containers containing medium, culture and distilled water.

#### **Cathodic chamber**

The cathode chamber of the MFC was made up of 0.5 liter plastic bottles filled with distilled water as catholyte.

#### **Anodic Chamber**

0.5 liter plastic bottles were used for this purpose. The bottles were surface sterilized by washing with 70% ethyl alcohol and followed by UV exposure for 15 minutes. Then 100 ml of previously enriched culture of bacteria was added in sterile soil.

#### **Salt bridge**

The salt bridge was prepared by dissolving 3% agarose in 2M NaCl. The mixture was boiled for 2 minutes and poured in PVC pipes (dimension 10 × 3 cm) under aseptic condition. The salt bridge was properly sealed and kept in refrigerator for proper settling. Two holes were made in the lower side of bottles for the insertion of salt bridge.

#### **Circuit Assembly**

Two chambers were internally connected by salt bridge and externally the circuit was connected with copper wires which were joined to the two electrodes at its two ends and to the multimeter by another two ends.

#### **Measurement of potential difference and current**

The potential difference generated by the Fuel Cell was measured by using multimeter from HAQYUE -DT830D.

#### **MFC operations**









All the components of MFC were connected i.e. via salt bridge internally and with externally with wires to the multimeter. The pure colony were aseptically transferred in 100 ml specific broth and incubated at 37° C at 160 rpm for 48 hours. The bottles were surface sterilized prior to operation of MFCs by 70% alcohol and exposed to UV radiation for 15 minutes. The salt bridge was sealed inside the holes under aseptic conditions. Sterile soil was poured in the anodic chamber and ARS4 culture broth was mixed in sterile soil and prepared liquid suspension. Then in cathodic chamber sterile distilled water was poured. The MFCs was operated at room temperature. The MFC set up was kept at static conditions. The varied carbon source and salts concentration was one by one tested isolates for their ability to generate potential difference. The MFCs was run up to 48 hrs and the voltage was recorded at every 1h, 24h, 48h interval in all the cases.

## **RESULTS AND DISCUSSION**

The alkaline Lonar Lake is a unique basaltic rock meteorite impact crater. Lonar Lake is a one such soda Lake in which the indigenous microflora is present, and such microbial flora has ability thrives in alkaline condition<sup>21</sup>. Total twenty eight bacterial isolates obtained in the isolation exercise, cultural, morphological characteristics and standard biochemical test were performed for all the isolates. This was done to avoid several identical isolates from the total isolates. Out of twenty eight, seven bacterial cultures were selected for the electricity generation, out of seven one bacterial isolate ARS4 was selected for the further MFC studies. In the present study, the 48h alkaline pH (10) culture was prepared and aseptically pours into anodic chamber which contain sterile soil.. Similar study was performed with MFC *B. selenitireducens* by Miller and Oremland<sup>13</sup>. Electricity can be generated directly from sewage sludge with a microbial fuel cells (MFCs), combining degradation of organic matter and MFC for the generation of bioelectricity and the degradation of sewage sludge organic matter under the alkaline condition studied by Yuan et al.<sup>22</sup>. In the present study, the 48h alkaline pH (10) culture was prepared and aseptically poured into anodic chamber which contain sterile soil. After the preparation of sediment slurry, MFC assembly was constructed MFC was constructed and measure the electricity generation after various intervals such as 1h, 24h and 48h. the electricity generate 387 and 290 mV after 1h and 24h interval respectively, but after 48h the electricity generation was dramatically decrease about 41% (229mV). Velasquez-Orta et al.<sup>23</sup> evaluated the performance of MFCs using two different types of algae as substrates- *Chlorella vulgaris* (a microalgae) and *Ulvalactuca* (a macroalgae). One of the first pure cultures to be studied as an oxidation catalyst in MFC systems was *Shewanella oneidensis*<sup>6,24</sup>. Salinity effect on the microbial fuel cell performance was investigated. The 4% of NaCl was added into the MFC, after the addition of NaCl, the electricity generation was found to be decrease. But as the incubation period was increase the electricity was also increases (1h, 19mV), after 24h and 48h the electricity was 111mV and 224mV generated respectively. The contrary result was observed by Luo et al.<sup>25</sup>, after the addition of NaCl on electricity generation was decreases. Muralidharan et al.<sup>26</sup> was studied on the impact of salt concentration on electricity production in microbial hydrogen based salt bridge fuel cells. The best of our knowledge, these MFC was most efficient for electricity generation. Parkash et al.<sup>27</sup> studied the impact of various salt and concentration on the electricity generation based on dual chambered MFC. They revealed that the KCl salt bridge was efficient electricity generating than the NaCl. The 4% of KCl was added into the MFC, after the addition of KCl, the electricity generation was found to be decrease. But as the incubation period was increase the electricity was also increases (1h, 4mV), after 24h and 48h the electricity was 104mV and 117mV generated respectively. But in the present study, the effect of salt on MFC, NaCl was the prominent electricity generation than the KCl, indicating a bacterium ARS4 was required NaCl for the MFC. Tarte et al.<sup>28</sup> were studies on effect of NaCl and Glucose on generation of electricity from

waste water with the different combinations of glucose and NaCl. In the present studies, bacterium ARS4 also supplemented with the glucose, after the addition of glucose, the electricity generation was found to be

increases. When the incubation period was increase the electricity also increases (1h, 119mV), after 24h and 48h the electricity was 168mV and 170mV generated respectively.

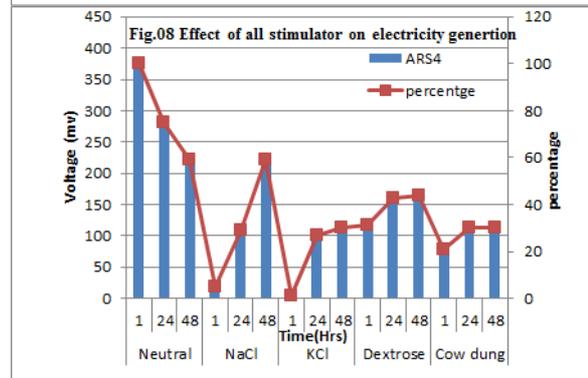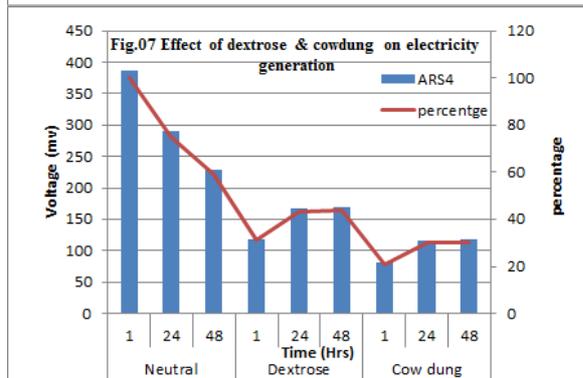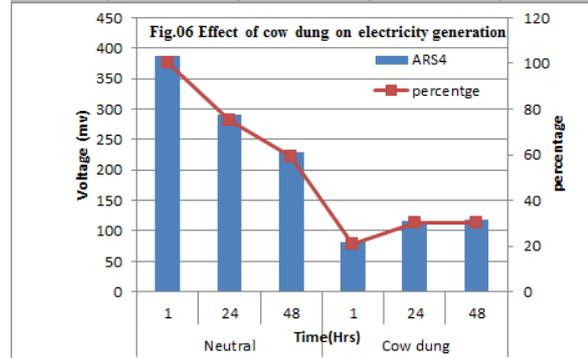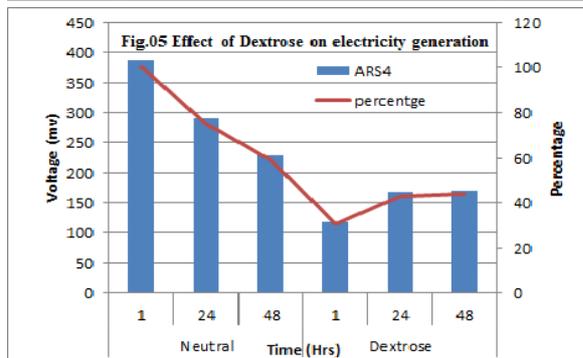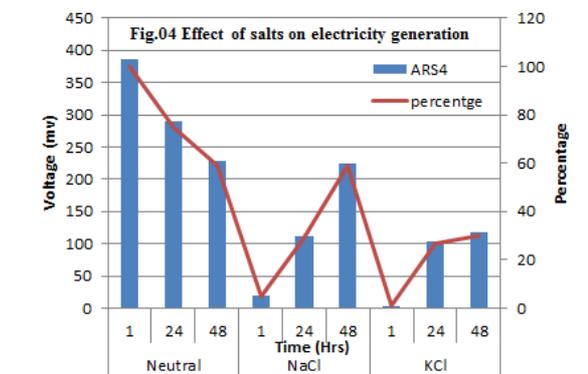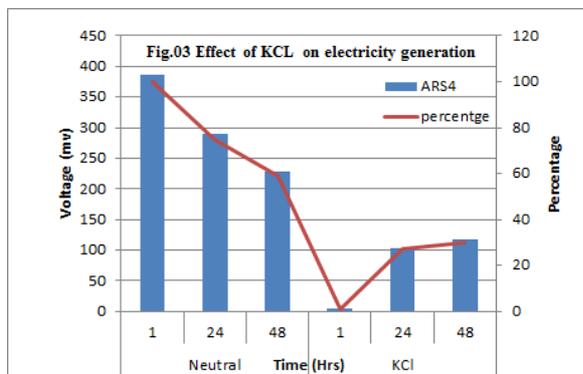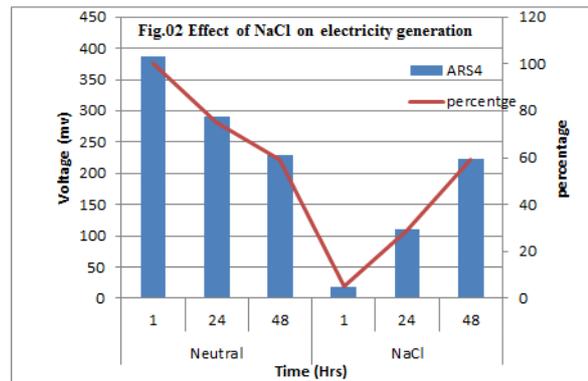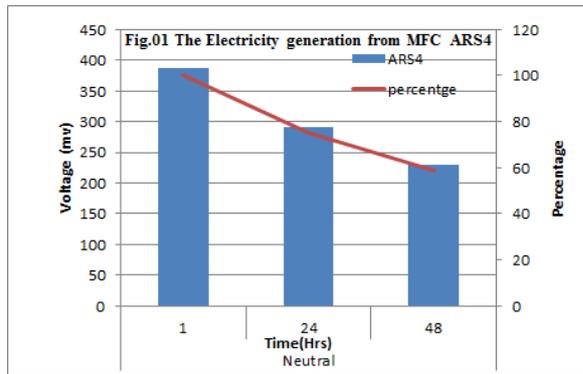

The various studies have been performed such as the effect of different carbon sources sugars, starch, and cellulose, salt, MFCs From waste water, and substrate for MFC's include human, animal, and industrial waste water<sup>29</sup>. Evaluation of electricity generation from animal based wastes in MFCs has also been studied<sup>30</sup>. In the present study, use of animal manure as the organic fuel and its bacteria as biocatalyst in the anode chamber along with water as catholyte for the production of bioelectricity generation by MFCs. The bacterium ARS4 also supplemented with the cow dung as organic fuel, after the addition of sterile cow dung suspension, the electricity generation was found to be increased. When the incubation period was increased the electricity also increases (1h, 81mV), after 24h and 48h the electricity was 116mV and 118mV generated respectively. Similar finding was studied by Kumar *et al*<sup>31</sup> explored the usage of cow dung as anolyte against sewage water as catholyte.

## CONCLUSION

A total twenty eight bacterial isolates obtained in the isolation exercise, cultural, morphological characteristics and standard biochemical test were performed for of all

the isolates. Out of twenty eight, seven bacterial cultures were selected for the electricity generation; out of seven ARS4 was selected for the further MFC studies. In this study, double chamber MFC using bacterium ARS4 was used as biocatalyst. Anode chamber was kept up in batch condition for the addition of sugar, cow dung and in cathode chamber salt was added and maintained at continuous condition. The MFC was constructed and measure the electricity generation after various intervals, 387mV was electricity was generated after 1h, but after 48h the electricity generation was dramatically decrease upto 229mV. The effect of salt on MFC, NaCl was enhance electricity generation than the KCl, indicating a bacterium ARS4 was required NaCl for the MFC and salt, sugar, and cow dung had an even greater effect on execute the electricity generation by MFCs. Our results also suggest that seeking for and isolating novel bacteria that are more halophilic and alkaliphilic from Lonar crater could be a new strategy to generate bioelectricity from MFCs.

## CONFLICT OF INTEREST

Conflict of interest declared none.

## REFERENCES

- Brecha RJ. Emission scenarios in the face of fossil-fuel peaking. *Energy Policy* 2008 36(9):3492–3504
- Deublein D, Steinhauser A. *Biogas from Waste and Renewable Resource* (Weinheim. Weinheim: Wiley-VCH. 2008 57–79.
- Allen RM, Bennetto HP. *Microbial fuel-cells. Applied biochemistry and biotechnology.* 1993 Sep 1;39(1):27-40.
- Liu H, Ramnarayanan R, Logan BE. Production of electricity during wastewater treatment using a single chamber microbial fuel cell. *Environmental science & technology.* 2004 Jan 1;38(7):2281-5.
- Bond DR, Holmes DE, Tender LM, Lovley DR. Electrode-reducing microorganisms that harvest energy from marine sediments. *Science.* 2002 Jan 18;295(5554):483-5.
- Kim BH, Kim HJ, Hyun MS, Park DH. Direct electrode reaction of Fe (III)-reducing bacterium, *Shewanella putrefaciens*. *Journal of Microbiology and Biotechnology.* 1999 Apr 1;9:127-31.
- Logan BE, Hamelers B, Rozendal R, Schröder U, Keller J, Freguia S, Aelterman P, Verstraete W, Rabaey K. Microbial fuel cells: methodology and technology. *Environmental science & technology.* 2006 Sep 1;40(17):5181-92.
- Du Z, Li H, Gu T. A state of the art review on microbial fuel cells: a promising technology for wastewater treatment and bioenergy. *Biotechnology advances.* 2007 Oct 31;25(5):464-82.
- Lovley DR, Coates JD, Blunt-Harris EL, Phillips EJ, Woodward JC. Humic substances as electron acceptors for microbial respiration. *Nature.* 1996 Aug 1;382(6590):445.
- Nealson KH, Moser DP, Saffarini DA. Anaerobic electron acceptor chemotaxis in *Shewanella putrefaciens*. *Applied and environmental microbiology.* 1995 Apr 1;61(4):1551-4.
- Logan B, Cheng S, Watson V, Estadt G. Graphite fiber brush anodes for increased power production in air-cathode microbial fuel cells. *Environmental science & technology.* 2007 May 1;41(9):3341-6.
- Rabaey K, Verstraete W. Microbial fuel cells: novel biotechnology for energy generation. *TRENDS in Biotechnology.* 2005 Jun 30;23(6):291-8.
- Miller LG, Oremland RS. Electricity generation by anaerobic bacteria and anoxic sediments from hypersaline soda lakes. *Extremophiles.* 2008 Nov 1;12(6):837-48.
- Joshi AA, Kanekar PP, Kelkar AS, Shouche YS, Vani AA, Borgave SB, Sarnaik SS. Cultivable bacterial diversity of alkaline Lonar Lake, India. *Microbial Ecology.* 2008 Feb 1;55(2):163-72.
- Dhundale VR. Characterization of organic solvent tolerant halo-alkali- thermostable amylase from *Bacillus cereus* OCW3(1). *Int J PharmaBiosci .* 2015 6(4): (B) 457 – 69.
- Dhundale VR, Hemke VM. Phylogenetic analysis of Bacilli from haloalkaline Lonar Soda Crater. *Int J Pharm Bio Sci.* 2015 6(4): (B) 279 – 90.
- Dhundale VR, More VR, Nagarkar RD, Hemke VM. Haloalkaliphilic *Bacillus flexus* AW3(2): potential for biotechnological applications. *Int J Pharm Bio Sci.* 2014 141: 1745–61.
- Dhundale VR, More VR, Nagarkar RD, Hemke VM, Tambekar DH. Isolation and characterization of a novel amylase from *Bacillus*

- pseudofirmus*DW4(1). Indian J Life sci 2014 4(1): 69-76.
19. Ringeisen BR, Lizewski SE, Fitzgerald LA, Biffinger JC, Knight CL, Crookes-Goodson WJ, Wu PK. Single cell isolation of bacteria from microbial fuel cells and Potomac River sediment. *Electroanalysis*. 2010 Apr 1;22(7-8):875-82.
  20. Tambekar DH, Dhundale VR. Studies on the physiological and cultural diversity of bacilli characterized from Lonar lake (MS) India. *Biosci Disco*. 2012;3(1):34-9.
  21. Hemke VM, Joshi SS, Fule NB, Dhundale VR, Tambekar DH. Phenetic diversity of alkaliphilic protease producing bacteria from alkaliphilic environment. 20145 10(1): 47-52.
  22. Yuan Y, Chen Q, Zhou S, Zhuang L, Hu P. Improved electricity production from sewage sludge under alkaline conditions in an insert-type air-cathode microbial fuel cell. *J Chem Technol Biotechnol*. 2012 87: 80–86 2012 DOI 10.1002/jctb.2686.
  23. Velasquez-Orta SB, Curtis TP, Logan BE. Energy from Algae using Microbial Fuel Cells. *Biotechnol. Bioengineering* 2009 103(6), 1068-1076.
  24. Bretschger O, Obraztsova A, Sturm CA, Chang IS, Gorby YA, Reed SB, *et al.*. Current production and metal oxide reduction by *Shewanella oneidensis* MR-1 wild type and mutants. *Appl Environ Microbiol*. 2007 73,7003–7012. doi: 10.1128/AEM.01087-07
  25. Luo Y, Heng-yun W, Juan-juan J, Xiu-feng L, Qi-ming Z, Ming-ping ZC, Nan-jiao. Salinity effect on the microbial fuel cell performance. *Appl. Mechanics Materials* 2014 651-653: 1365-1369.
  26. Muralidharan A, Babu A, Nirmalraman K, Ramya M. Impact of salt concentration on electricity production in microbial hydrogen based salt bridge fuel cells. *Indian Journal of Fundamental Appl Life Sci*. 2011 1(2):178-184.
  27. Parkash A, Aziz S, Soomro SAJ. Impact of salt concentrations on electricity generation using hostel sludge based dual chambered Microbial Fuel Cell. *Bioprocess Biotech* 5: 252 doi:10.4172/2155-9821.1000252.
  28. Tarte S, Pawar V, Kadam A, Chandre M. Studies on effect of NaCl and Glucose on generation of electricity from waste water. *Int J Curr Biotechnol* 2015 3(1):12-15.
  29. Barua PK, Deka D. Electricity Generation from Biowaste Microbial Fuel cells; *Int J Energy, information Communications*. 2010 1(1):220-223.
  30. Oladejo D, Shoewu OO, Yussouff AA, Rapheal H. Evaluation of electricity generation from animal based wastes in MFC. *Int J Scientific Technol Res* 2015 4(4) 85-90.
  31. Kumar S, Kumar SD, Babu GK. A study on the electricity generation from the cow dung using microbial fuel cell. *J. Biochem. Tech*. 2012 3(4):442:447.

## Reviewers of this article



**Asst. Prof. Dr. Sujata Bhattachary**

Assistant Professor, School of Biological and Environmental Sciences, Shoolini University, Solan (HP)-173212, India

**Dr. Kapil kample M.Sc., Ph.D**

Assistant professor  
PG Department of Microbiology,  
SGB Amravathi university  
Amravathi



**Prof. Dr. K. Suriaprabha**

Asst. Editor, International Journal  
of Pharma and Bio sciences.



**Prof. P. Muthuprasanna**

Managing Editor, International  
Journal of Pharma and Bio sciences.

**We sincerely thank the above reviewers for peer reviewing the manuscript**